



# ATC-1H ESD Safe Transport Cart



ESD Transport Cart, Three levels, Conductive no marking wheels, Conductive Plastic Durable Shelves, grounding wire for positive discharge when parked. Static discharge to the ESD floor through the wheels is guaranteed for every unit.

## Technical specifications:

- Outer dimension: depth: 660mm (25.98”), width:480 mm (18.89”), height: 985mm (38.78”)
- Loading capacity of top shelf: 50 kg
- Total loading capacity: 150 kg
- All tires are made from ESD- thru conductive material
- Wheel diameter: Ø 75 mm; two non-rotating and two rotating with brakes.





**BOKAR International**  
650 Scranton Pocono Hwy.,  
Covington Twp., PA 18444, USA

Tel: (570) 842-2812 Fax: (570) 842-4290  
e-mail: [bokar@bokar.com](mailto:bokar@bokar.com)

[www.bokar.com](http://www.bokar.com), US Master Distributor:[www.bomir.com](http://www.bomir.com)

e-mail: [bomir@bomir.com](mailto:bomir@bomir.com)

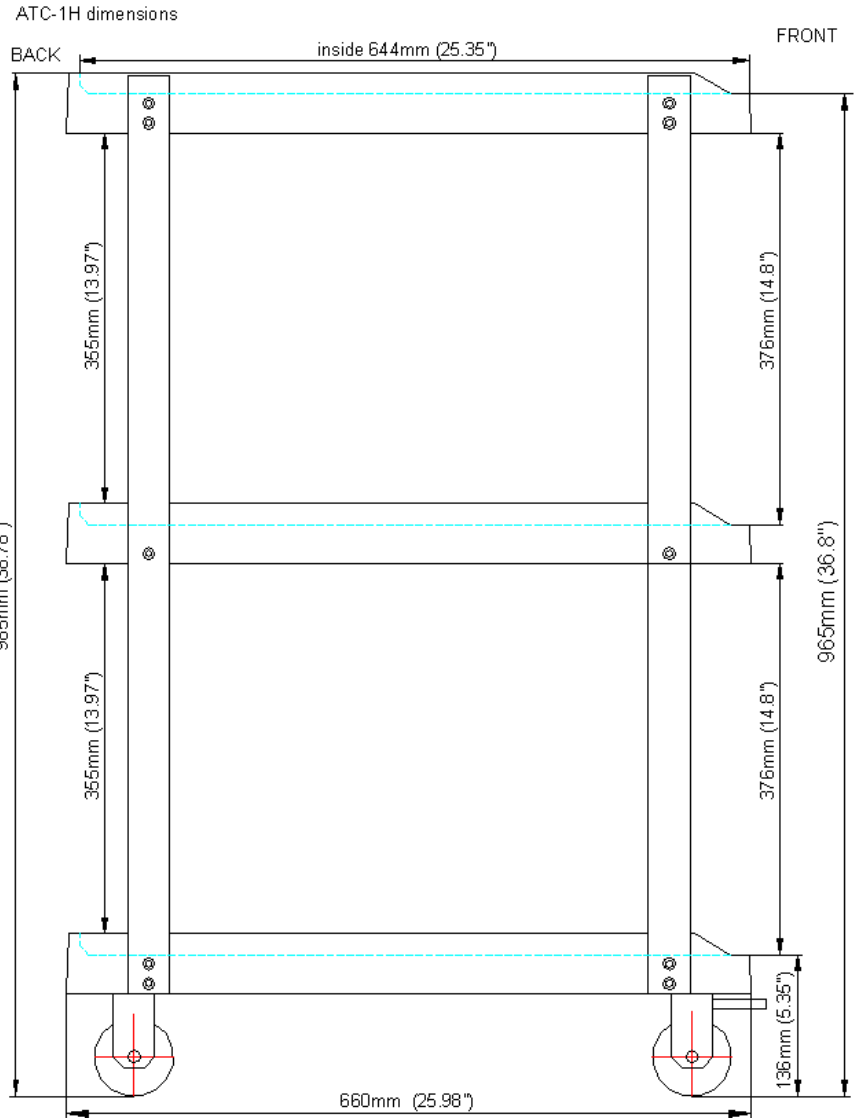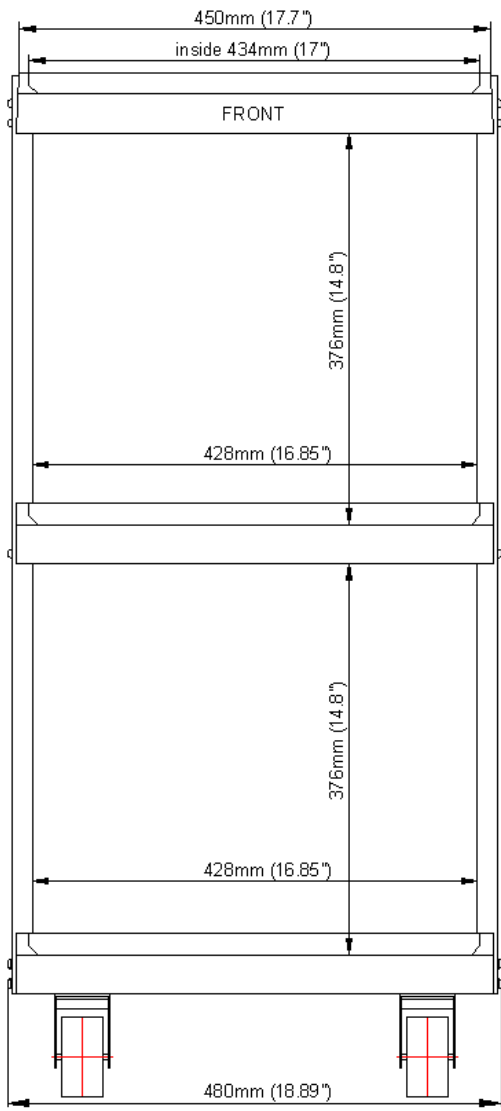

**BOKAR International**  
 650 Scranton Pocono Hwy.,  
 Covington Twp., PA 18444, USA

Tel: (570) 842-2812 Fax: (570) 842-4290

e-mail: [bokar@bokar.com](mailto:bokar@bokar.com)

[www.bokar.com](http://www.bokar.com)

US Master Distributor: [www.bomir.com](http://www.bomir.com)

e-mail: [bomir@bomir.com](mailto:bomir@bomir.com)